




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B23K 9/09	A1	(11) International Publication Number: WO 98/50190 (43) International Publication Date: 12 November 1998 (12.11.98)
(21) International Application Number: PCT/SE98/00829 (22) International Filing Date: 5 May 1998 (05.05.98) (30) Priority Data: 9701696-8 5 May 1997 (05.05.97) SE (71) Applicant (for all designated States except US): ESAB AB [SE/SE]; P.O. Box 8004, S-402 77 Göteborg (SE). (72) Inventors; and (75) Inventors/Applicants (for US only): ÅBERG, Per [SE/SE]; Hjortronstigen 2, S-695 30 Laxå (SE). BENGTTSSON, Lars [SE/SE]; von Boijgatan 10 A, S-695 32 Laxå (SE). (74) Agent: NILSSON, Kent; Esab AB, S-695 81 Laxå (SE).		(81) Designated States: BR, CZ, CZ (Utility model), JP, PL, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>In English translation (filed in Swedish).</i>

(54) Title: METHOD AND APPARATUS FOR ARC WELDING WITH MELTING ELECTRODE

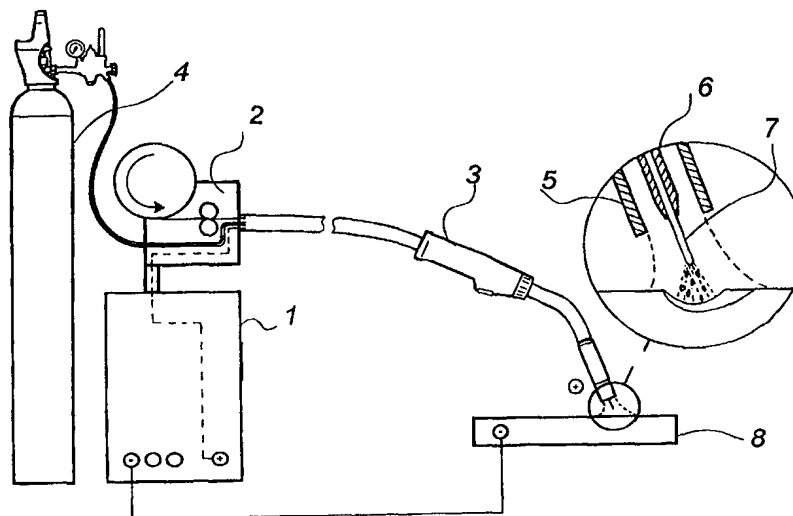

(57) Abstract

The invention comprises a method and an arrangement for pulsed gas metal-arc welding with an electrode fed to the welding site continuously at a given rate, the fusion conditions being adapted in such a manner that the material transfer from the electrode (7) to the workpiece (8) takes place essentially without short-circuiting drops by the welding current being periodically increased to a pulse current of such size and duration that the current density in the electrode causes sufficient electromagnetic forces in order to separate one drop for each pulse, and where the arc length is stabilized by regulating the power supply for the arc by means of a regulator mainly on the basis of a measured arc voltage, characterized in that short-circuiting of the arc is detected as arc-voltage decreases and/or current increases, and in that the fusion power supplied is increased by the arc-length regulator being given an additional increase for each short-circuit detected.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

METHOD AND APPARATUS FOR ARC WELDING WITH MELTING ELECTRODETechnical field

The present invention relates to a method and an
5 arrangement for correcting, during pulsed gas metal-arc
welding with a continuously fed electrode and material
transfer from the electrode to the workpiece essentially
in the form of non-short-circuiting drops, the power
supply for the welding process on the basis of the
10 occurrence of brief short circuits between the electrode
and the workpiece. The correction is carried out in a
regulating process in which the power supply is in the
main regulated depending on the arc voltage so that a
constant arc length is obtained. The correction
15 facilitates welding using a very short arc.

Background

In gas metal-arc welding using a continuously fed
fusible electrode, usually called MIG/MAG welding, the
workpiece is heated principally by the arc. The electrode
20 is heated on the one hand by the power generated when the
welding current flows through the electrode projection,
that is to say the free electrode end between the contact
nozzle, where the current transfer to the electrode takes
place, and the arc, and on the other hand by the arc
25 itself. Basic regulation of the welding process is aimed
at obtaining a fusion rate of the electrode that
corresponds to the electrode feed rate. Further aims of
regulation may be, for example, to influence the quantity
of heat supplied to the workpiece.

30 MIG/MAG welding is carried out in one of three
states. In the case of short-arc welding, the material
transfer from the electrode to the workpiece takes place
by means of large short-circuiting drops, as shown in
principle in Fig. 2. By virtue of the fact that the
35 process consists of alternating arcs and short-circuiting
drop transfers, the average voltage between the electrode
and the workpiece is low and the heat transfer to the

basic material is thus moderate. When the power supplied is increased, the mixed-arc range is entered, in which the material transfer is carried out by means of a mixture of short-circuiting and non-short-circuiting drops. The result is an unstable arc with a great deal of welding splash and welding smoke. Welding in this range is usually avoided. When the power supply is sufficiently great, the process enters the spray range, in which the material transfer is carried out by small finely-distributed drops without short-circuits, as shown in Fig. 3. The quantity of splash is clearly lower than in the case of short-arc welding. The heat supply to the basic material is greater in this case and the method is suitable principally for thicker material to be welded.

The third state is called pulsed welding and involves using advanced regulation to control the separation itself of the drops with the aid of a suitable current pulse. Each pulse separates a drop and the drops are sufficiently small so as not to short-circuit. This method, which is often called synergic pulsing, affords advantages from the spraying range in the form of low welding splash without the disadvantages of the great heat transfer.

So as to obtain stable conditions with uniform welding results even in the case of varying gun-guidance, the arc length is regulated. A method of doing this is described in EP 387 223. In this known method, the arc voltage is measured and compared with a reference value, and the current for the welding process is regulated on the basis of the calculated voltage difference so that the fusion rate increases when the arc voltage is lower than the reference value and decreases in the opposite case.

In the welding of thin plate, a low heat supply to the basic material and thus a short arc length are required in order to reduce the risk of burning through. At the same time, freedom from splashing is as always highly desirable. Pulsed welding gives freedom from splashing but greater heat than short-arc welding. It is

therefore desirable to weld using the shortest possible arc length without the material transfer taking place via short-circuiting drops which explode easily and thus cause splashing.

5 Another reason for keeping the arc short is that a long arc destroys the gas protection in the case of, for example, aluminium welding.

 EP 0 170 248 describes a welding machine for pulsed MIG/MAG welding, in which the equipment is regulated depending on the difference between a preset
10 desired value for the number of drop short-circuits per unit of time and the actual number of short-circuits taking place. This regulating method gives a short arc and thus low heat transfer to the workpiece. One
15 disadvantage, however, is that it involves completed drop short-circuits with the attendant risk of welding splash. A further disadvantage is that, with this method, no arc-length regulation is possible if it is desired to weld using a longer arc and thus a greater heat supply to the
20 workpiece takes place.

 A further problem with pulsed welding is the requirement for very accurate parameter settings. This may cause great problems when access is poor and it is necessary to turn the welding gun during welding in
25 confined spaces. It is then very difficult to maintain a constant height above the workpiece. In this case, it is important to use a regulating method that can handle great deviations.

The object of the invention

30 The object of the present invention is thus to make available a method and an arrangement for pulsed welding that completely or partly eliminate the problems of the known art.

 The invention comprises a method and an
35 arrangement for pulsed gas metal-arc welding with an electrode fed to the welding site continuously at a given rate, the fusion conditions being adapted in such a manner that the material transfer from the electrode to

the workpiece takes place essentially without short-circuiting drops by the welding current being periodically increased to a pulse current of such size and duration that the current density in the electrode
5 causes sufficient electromagnetic forces in order to separate one drop for each pulse, and where the arc length is stabilized by regulating the power supply for the arc by means of a regulator mainly on the basis of a measured arc voltage, characterized in that short-circuiting of the arc is detected as arc-voltage
10 decreases and/or current increases, and in that the fusion power supplied is increased by the arc-length regulator being given an additional increase for each short-circuit detected.

15 As a result of the arc pressure, the molten pool is always in motion. When the arc length is shortened, the electrode end will briefly come into contact with the moving molten pool. These brief contacts do not normally lead to any material transfer, however, as the drop is
20 retained on the electrode by forces directed towards the electrode. These repellant forces may, for example, be connected with the vaporization of principally oxidized alloying materials from the surface of the fusible electrode end. By detecting these brief short-circuits
25 and, on the basis of their occurrence, increasing the power for the arc, the fusion rate and thus the arc length are increased. In this way, the procedure and the arrangement according to the invention make it possible to weld with minimum arc length without ending up in the
30 short-arc range.

The method facilitates considerably synergic pulsing with a very short arc and thus makes possible virtually splash-free welding, even of thin plate. The method also offers considerably reduced sensitivity for
35 parameter-setting accuracy and thus makes possible welding in situations that are very difficult to deal with.

Further advantageous features of the invention are indicated in the subclaims.

Brief description of the drawings

The invention will now be described in greater detail with the aid of exemplary embodiments and with reference to the attached drawings, in which:

5 Fig. 1 shows diagrammatically an arrangement for MIG/MAG welding;

10 Fig. 2 shows how the current and the voltage change when a drop is transferred between the welding electrode and the workpiece in the case of short-arc welding;

 Fig. 3 shows a cross-sectional view of the lower part of the welding nozzle and a workpiece in the case of welding in the spray range;

15 Fig. 4 shows a basic diagram for pulsed welding; and

 Fig. 5 shows a flow diagram for regulation according to the invention.

Description of preferred embodiments

20 Fig. 1 shows an arrangement for MIG/MAG welding. This arrangement comprises a pulsed welding-current source 1 and a wire-feed mechanism 2. The arrangement also comprises a welding gun and a gas container 4 connected thereto. The welding gun comprises a front nozzle comprising an outer pipe 5 through which the gas is guided out, and, arranged centrally in this pipe, an inner pipe, the contact nozzle 6, through which the electrode 7 is guided. The electrode 7 and the workpiece 8 are connected in a conventional manner to the welding-current source 1 so that a potential difference is formed between them. The arrangement is controlled so that the material transfer from the electrode to the workpiece takes place essentially without short-circuiting drops (Fig. 4). This is effected by the welding current being periodically increased to a pulse current of such size and duration that the current density in the electrode causes sufficient electromagnetic forces in order to separate one drop for each pulse.

 In Fig. 4, the principle of pulsed welding is

shown, in which the current strength increases in pulses, which leads to separation of drops from the electrode end. Current level 1 corresponds in this connection to the peak value of the pulses, current level 2 to the average current level and current level 3 to a background current level.

The arrangement also comprises a regulator according to Fig. 5 for stabilizing the arc length so that the fusion rate is adapted to the actual electrode feed rate. This is carried out mainly by the power supply being controlled on the basis of measured arc voltage.

Fig. 5 shows how regulation by the regulator according to the invention takes place. First, the regulator reads a pulse-duration timer so as to start together with a new period of the pulse cycles. As a result of the arc pressure, the molten pool is always in motion. When the arc length is shortened, the electrode end will briefly come into contact with the moving molten pool. These brief contacts do not normally lead to any material transfer, however, as the drop is retained on the electrode by forces directed towards the electrode. These repellant forces may, for example, be connected with the vaporization of principally oxidized alloying materials from the surface of the fusible electrode end. These short-circuits are detected by identifying arc-voltage decreases and/or current increases, and the regulator is given an additional increase for each short-circuit detected.

Then, regulator calculations are carried out according to:

$$t_i = t_i + t_b \cdot k_i (\Delta U - k_k)$$

$$\Delta t_b = t_b \cdot \Delta U \cdot k_a + t_i$$

$$t_b = t_{b\text{nom}} + \Delta t_b$$

$$i_b = m/t_b$$

where:

t_i = integration sum

ΔU = error signal in arc length regulation

5 k_a, k_i = amplification factors for the proportional and, respectively, integrating part in the arc-length regulation

t_b = background time

i_b = background current

t_{bnom} = nominal background time

10 m = constant for current/time area during background time
 k_k is set to a positive value if there has been a short-circuit during the previous period of time, otherwise to zero.

15 Finally, i_b is interpreted as current reference and a background-time timer is set to t_b . In this way, the fusion power supplied is thus increased on detection of a short-circuit, and the integrating part of the arc-length regulator increases the fusion power as long as short-circuits occur. The power supply is influenced by
20 regulating the size and duration of the background current. Then the regulating process is repeated.

Preferably, only short-circuits shorter than 500 μs generate an additional increase for the regulator as it is principally short-circuits of short duration
25 that do not involve material transfer that are relevant in regulation. By detecting brief short-circuits and, on the basis of their occurrence, increasing the power for the arc, the fusion rate and thus the arc length are increased. In this way, the procedure and the arrangement
30 according to the invention make it possible to weld with minimum arc length without ending up in the short-arc range, as the regulating system according to the invention reacts before the actual short-circuit that brings about material transfer from the electrode to the
35 workpiece. The invention therefore results in a considerable improvement on the previously known art, in particular as far as welding with short arc lengths is concerned, and with regard to the tolerance range for setting parameters.

The arc-length regulator described can of course be realized in both software and hardware and in digital and/or analogue form.

PATENT CLAIMS

1. Method for pulsed gas metal-arc welding with an electrode fed to the welding site continuously at a given rate, the fusion conditions being adapted in such a manner that the material transfer from the electrode to the workpiece takes place essentially without short-circuiting drops by the welding current being periodically increased to a pulse current of such size and duration that the current density in the electrode causes sufficient electromagnetic forces in order to separate one drop for each pulse, and where the arc length is stabilized by regulating the power supply for the arc by means of a regulator mainly on the basis of a measured arc voltage, characterized in that short-circuiting of the arc is detected as arc-voltage decreases and/or current increases, and in that the fusion power supplied is increased by the arc-length regulator being given an additional increase for each short-circuit detected.
2. Method according to Claim 1, characterized in that an integrating part of the arc-length regulator increases the fusion power as long as short-circuits occur.
3. Method according to Claim 2, characterized in that only short-circuits shorter than 500 μ s generate an additional increase.
4. Method according to any one of Claims 1 - 3, characterized in that the power supply is influenced by regulating the value and time of the background current.
5. Arrangement for pulsed gas metal-arc welding comprising a welding-power unit (1), a wire-feed mechanism (2), adapted for in the main non-short-circuiting material transfer from the electrode (7) to the workpiece (8) by periodically increasing the welding current to a pulse current of such size and duration that the current density in the electrode causes sufficient electromagnetic forces in order to separate one drop for each pulse, and a regulator which regulates the power supply for the arc for stabilizing the arc length mainly


on the basis of a measured arc voltage, characterized in that the regulator is also adapted to detect arc-voltage decreases and/or current increases indicating short-circuits of the arc, and in that the power regulator gives an additional increase of the welding power for each short-circuit detected.

6. Arrangement according to Claim 5, characterized in that the regulator comprises an integrating part adapted to increase the welding power as long as short-circuits occur.

7. Arrangement according to Claim 6, characterized in that the regulator is adapted to generate an additional increase only for short-circuits shorter than 500 μ s.

8. Arrangement according to any one of Claims 5 - 7, characterized in that the regulator influences the power supply by means of the value and time of the background current.

Fig. 1

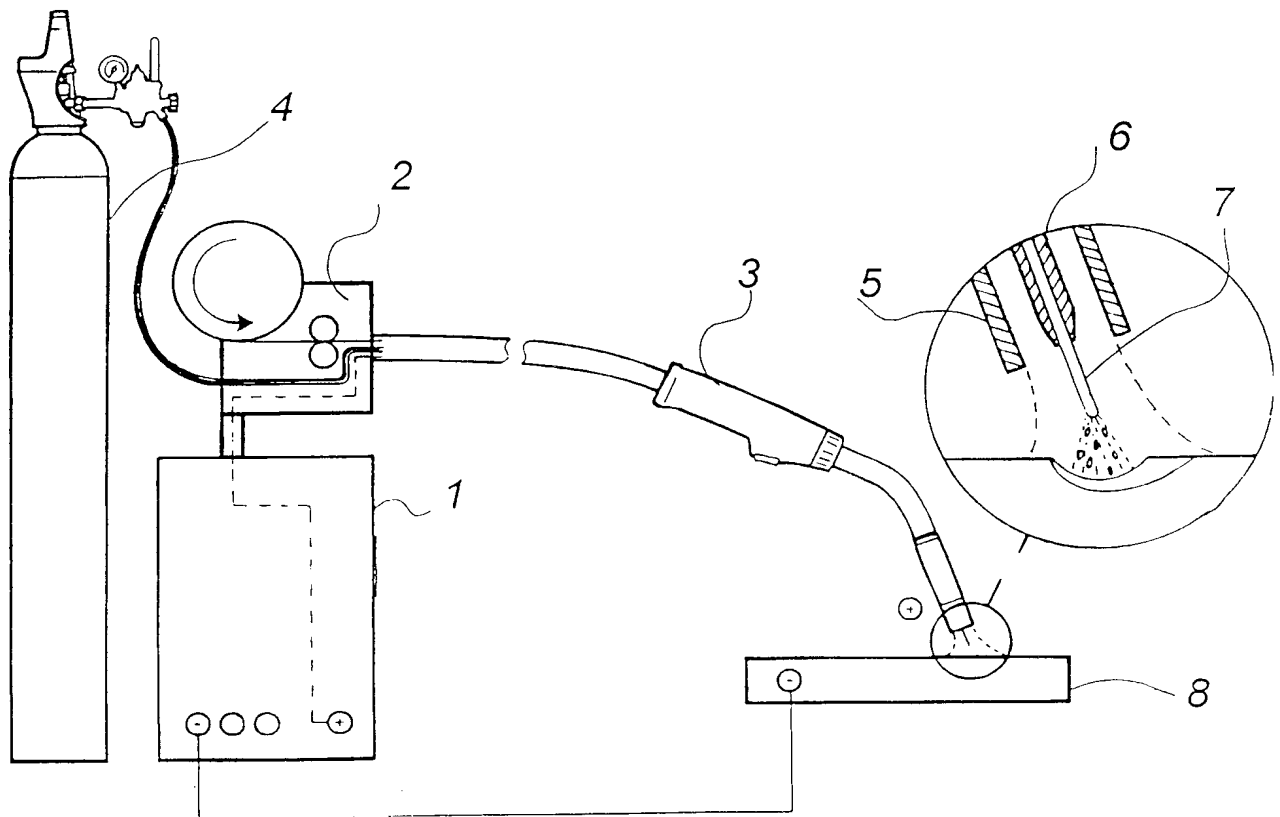

2 / 3

Fig. 2



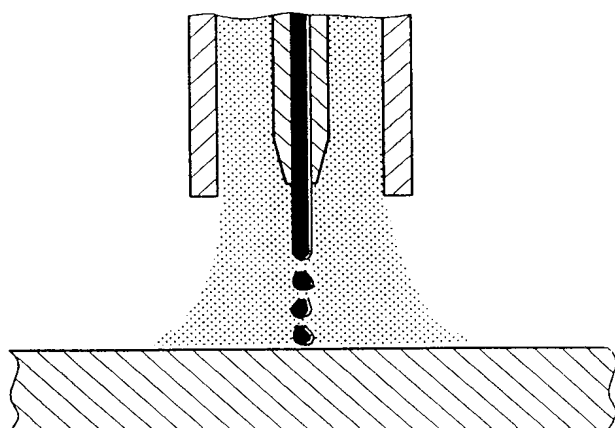


Fig. 3

Fig. 4

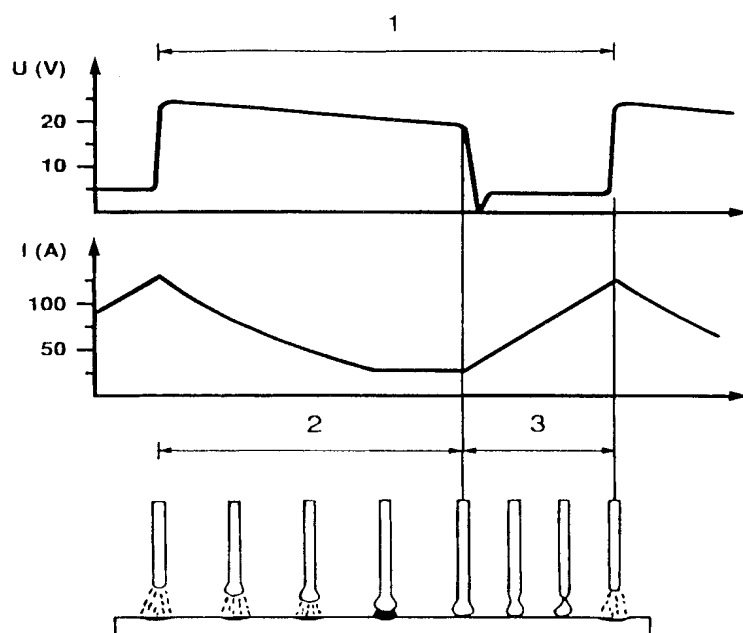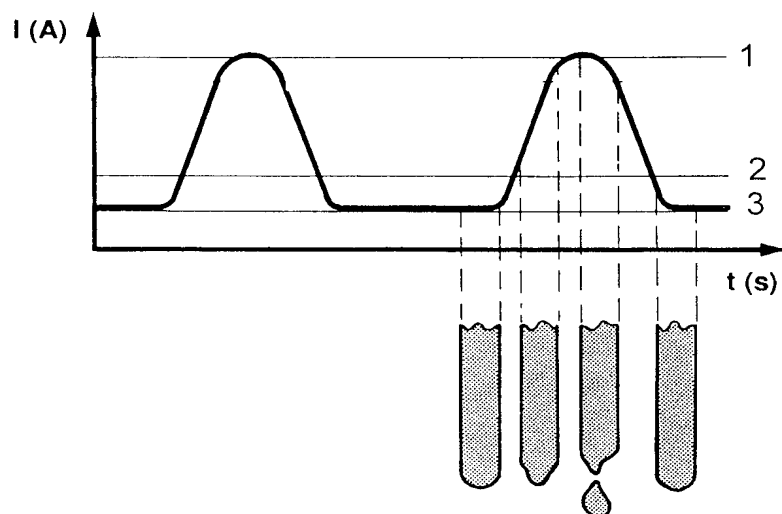

3/3

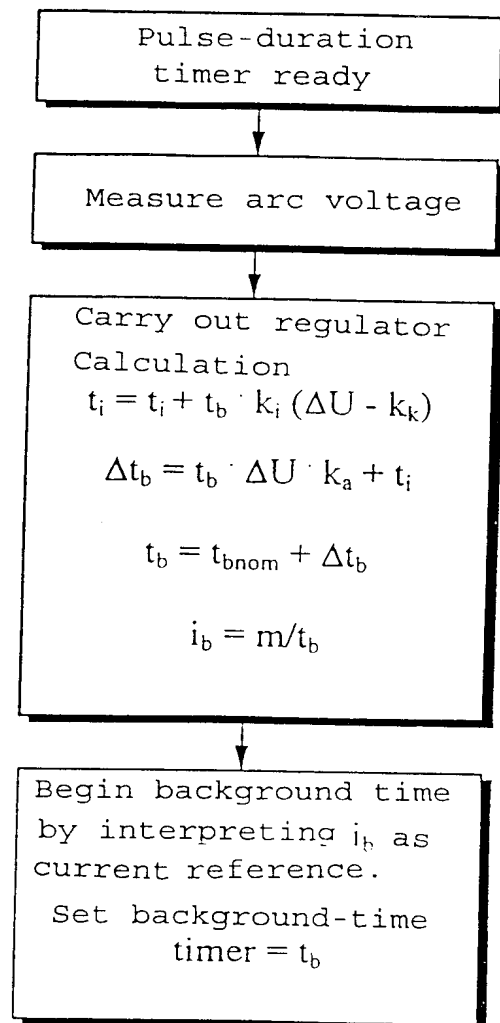


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/00829

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: B23K 9/09 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: B23K		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
WPI		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	Patent Abstracts of Japan, abstract of JP 6-23547 A (TOYOTA MOTOR CORP), 1 February 1994 (01.02.94) --	1-8
A	Patent Abstracts of Japan, abstract of JP 1-118371 A (MITSUBISHI ELECTRIC CORP), 10 May 1989 (10.05.89) --	1-8
A	Patent Abstracts of Japan, abstract of JP 57-109573 A (MITSUBISHI DENKI K.K.), 8 July 1982 (08.07.82) --	1-8
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
24 August 1998		26 -08- 1998
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Gordana Ninkovic Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 98/00829

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4758707 A (GRAEME J. OGILVIE ET AL.), 19 July 1988 (19.07.88), column 2, line 60 - column 3, line 26 -- -----	1-8

Information on patent family members

International application No.

PCT/SE 98/00829

Form PCT/ISA/210 (patent family annex) (July 1992)